

SCD5928

8-Channel Analog Multiplexer

RHD5928

Features

- Single power supply operation at 3.3V or 5V
- Radiation performance
 - Total dose: > 1 Mrad(Si); Dose rate = 50-300 rad(Si)/s
 - ELDRS Immune
 - SEL Immune > 100 MeV-cm²/mg
 - Neutron Displacement Damage > 10¹⁴ neutrons/cm²
- Full military temperature range
- Rail to Rail operation
- Low power consumption < 4.0mW
- One address bus (A0-2), and one enable line
- Designed for aerospace and high reliability space applications
- Packaging – Hermetic ceramic SOIC
 - 16-pin, .417"L x .300"W x .120"Ht
 - Weight - 0.8 grams max
- **Radiation Hardness Assurance Plan: DLA Certified to MIL-PRF-38534, Appendix G.**

General Description

The RHD5928 is a radiation hardened, single supply, 8 Channel Multiplexer in a 16-pin SOIC package. The RHD5928 design uses specific circuit topology and layout methods to mitigate total ionizing dose effects and single event latchup. These characteristics make the RHD5928 especially suited for the harsh environment encountered in Deep Space missions. It is guaranteed operational from -55°C to +125°C. Available screened in accordance with MIL-PRF-38534 Class K, the RHD5928 is ideal for demanding military and space applications.

Organization and Application

The RHD5928 is an 8 to 1 CMOS multiplexer. Channel selection is controlled by 3 bit binary addressing and an active low enable. All inputs and outputs are diode protected.

The devices will not latch with SEU events to above 100 MeV-cm²/mg. Total dose degradation is minimal to above 1 Mrad(Si). Displacement damage environments to neutron fluence equivalents in the mid 10¹⁴ neutrons per cm² range are readily tolerated. There is no sensitivity to low-dose rate (ELDRS) effects. SEU effects are application dependent.

SCD5928

8-Channel Analog Multiplexer

RHD5928

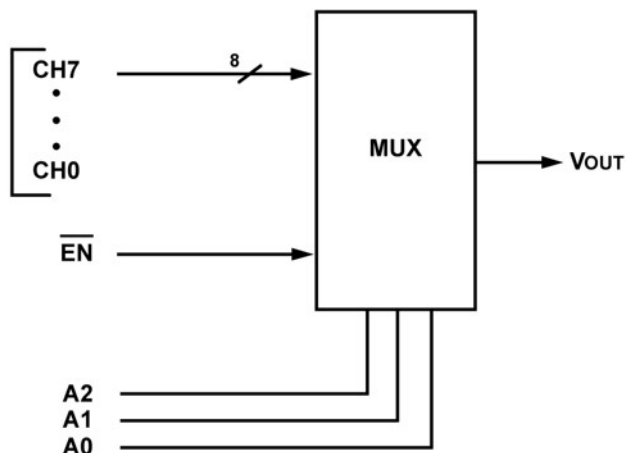


Figure 1: Block Diagram

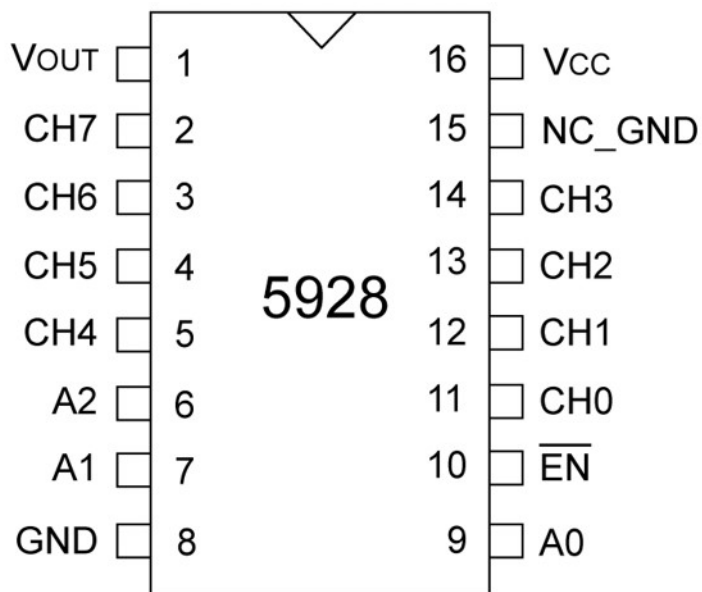


Figure 2: Package Pin-Out

Notes:

- 1) Package and lid are electrically isolated from signal pads.
- 2) It is recommended that the Lid and NC_GND pin be grounded. This prevents any ESD or static buildup.

SCD5928

8-Channel Analog Multiplexer

RHD5928

Pin	Signal Name	Definition
1	V _{OUT}	Output of Multiplexer.
2	CH7	Analog Input 8
3	CH6	Analog Input 7
4	CH5	Analog Input 6
5	CH4	Analog Input 5
6	A2	Address Bus (MSB)
7	A1	Address Bus
8	GND	DC Supply Return.
9	A0	Address Bus (LSB)
10	\overline{EN}	A Logic High will disable the Multiplexer so that the output is high impedance.
11	CH0	Analog Input 1
12	CH1	Analog Input 2
13	CH2	Analog Input 3
14	CH3	Analog Input 4
15	NC_GND	Ground this pin to prevent ESD or Static Buildup
16	VCC	DC Supply Voltage.

Figure 3: Pin-Out Description

Absolute Maximum Ratings

Parameter	Range	Units
Case Operating Temperature Range	-55 to +125	°C
Storage Temperature Range	-65 to +150	°C
Supply Voltage (+V _{CC})	+7.0	V
Digital Input Overvoltage (V _{EN} , V _A)	< V _{CC} +0.4 > GND -0.4	V V
Analog Input Over Voltage (CH0-CH7)	< V _{CC} +0.4 > GND -0.4	V V

Notice: Stresses above those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress rating only; functional operation beyond the "Operation Conditions" is not recommended and extended exposure beyond the "Operation Conditions" may affect device reliability.

Recommended Operating Conditions

Symbol	Parameter	Typical	Units
+V _{CC}	Power Supply Voltage	3.3 to 5.0	V
V _{IL}	Low Level Input Voltage	30% V _{CC}	V
V _{IH}	High Level Input Voltage	70% V _{CC}	V

SCD5928

8-Channel Analog Multiplexer

RHD5928

Electrical Performance Characteristics(T_C = -55°C TO +125°C, +V_{CC} = +5V -- Unless Otherwise Specified)

Parameter	Symbol	Conditions	MIN	MAX	Units	
Supply Current (+V _{CC}) <u>1</u> /	+I _{CC}	$\overline{EN} = 30\% V_{CC}$	-	800	μA	
	+I _{SBY}	$\overline{EN} = 70\% V_{CC}$	-	200	μA	
Address Input Current (A0-A2) <u>1</u> /	I _{AL}	V _A = 30% V _{CC}	+25°C	-5	5	nA
			+125°C	-50	50	nA
	I _{AH}	V _A = 70% V _{CC}	+25°C	-5	5	nA
			+125°C	-50	50	nA
Enable Input Current (\overline{EN}) <u>1</u> /	I _{ENL}	V _{EN} = 30% V _{CC}	+25°C	-5	5	nA
			+125°C	-50	50	nA
	I _{ENH}	V _{EN} = 70%V _{CC}	+25°C	-5	5	nA
			+125°C	-50	50	nA
High Input Leakage Current (CH0-CH7) <u>1</u> /	I _{INLK5}	V _{IN} = +5V, V _{EN} = 70% V _{CC} , Output and all unused MUX inputs under test = 0V	+25°C	-5	5	nA
			+125°C	-50	50	nA
Low Input Leakage Current (CH0-CH7) <u>1</u> /	I _{INLK0}	V _{IN} = 0V, V _{EN} = 70% V _{CC} Output and all unused MUX inputs under test = +5V	+25°C	-5	5	nA
			+125°C	-50	50	nA
Output Leakage Current (V _{OUT}) <u>1</u> /	I _{OUTLK}	V _{OUT} = +5V, V _{EN} = 70% V _{CC} , All inputs grounded except channel being tested	+25°C	-5	5	nA
			+125°C	-50	50	nA
Switch ON Resistance <u>1</u> /	R _{DSON}	V _{IN} = 0V, V _{EN} = 30% V _{CC} , I _{OUT} = +1mA V _{IN} = +2.5V, V _{EN} = 30% V _{CC} , I _{OUT} = -0.6mA V _{IN} = +5V, V _{EN} = 30% V _{CC} , I _{OUT} = -1mA	-55°C	-	500	Ω
			+25°C	-	750	Ω
			+125°C	-	1000	Ω

Note:

- 1) Specification derated to reflect Total Dose exposure to 1 Mrad(Si) @ +25°C

SCD5928

8-Channel Analog Multiplexer

RHD5928

Switching Characteristics(T_c = -55°C TO +125°C, +V_{CC} = +5V -- Unless Otherwise Specified)

Parameter	Symbol	Conditions	TEMP	MIN	MAX	Units
Address to Output Delay	t _{AHL}	V _{OUT} High to Low Transition	-55°C	10	150	ns
			+25°C	10	150	ns
			+125°C	10	200	ns
	t _{ALH}	V _{OUT} Low to High Transition	-55°C	10	150	ns
			+25°C	10	150	ns
			+125°C	10	200	ns
Enable to Output Delay	t _{ONEN}	(Enabled)	-55°C	10	150	ns
			+25°C	10	150	ns
			+125°C	10	200	ns
	t _{OFFEN}	(Disabled)	ALL	10	200	ns

Truth Table (CH0 – CH7)

A2	A1	A0	\overline{EN}	"ON" CHANNEL 1/
X	X	X	H	NONE
L	L	L	L	CH0
L	L	H	L	CH1
L	H	L	L	CH2
L	H	H	L	CH3
H	L	L	L	CH4
H	L	H	L	CH5
H	H	L	L	CH6
H	H	H	L	CH7

Note:

- 1) Between (CH0-CH7) and V_{OUT}

SCD5928

8-Channel Analog Multiplexer

RHD5928

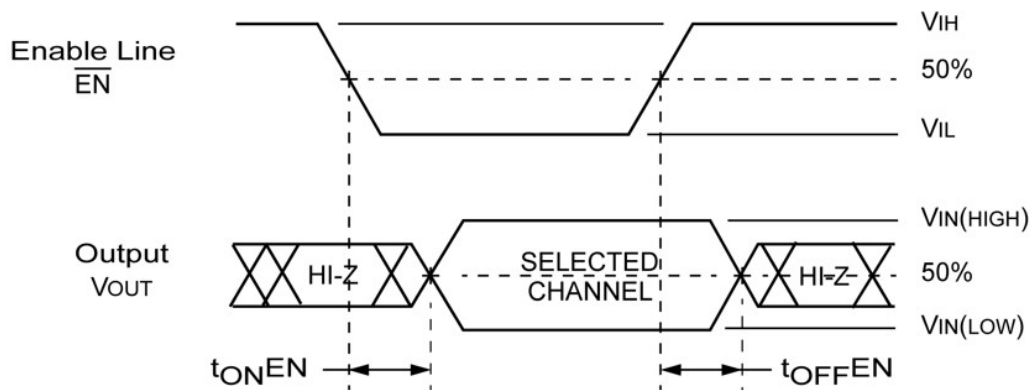
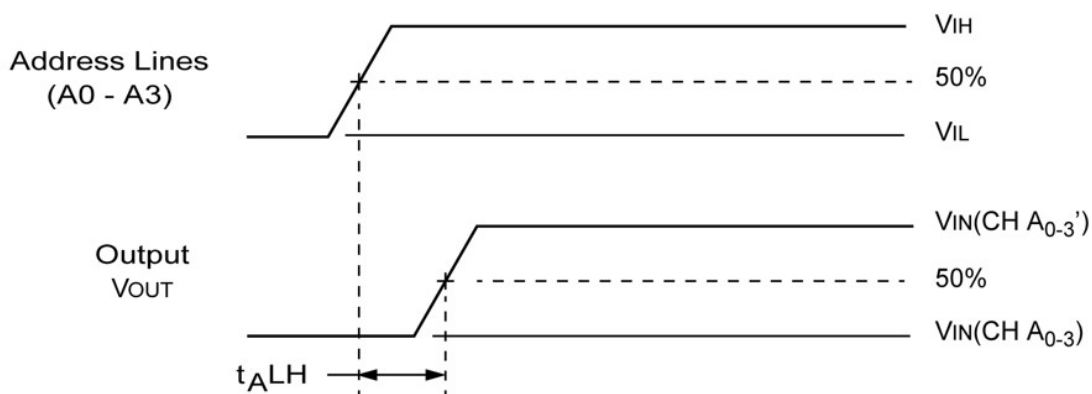
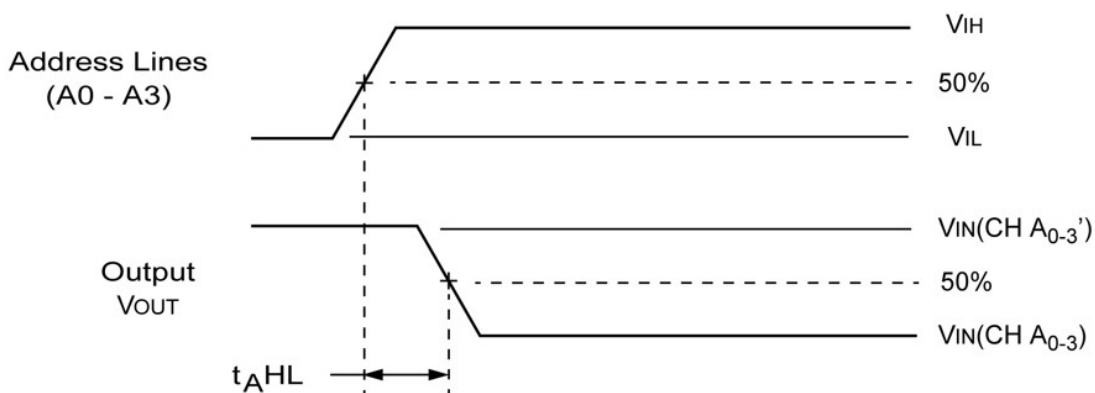


Figure 4: RHD5928 Switching Diagrams

Note: f = 10KHz, Duty cycle = 50%.

SCD5928

8-Channel Analog Multiplexer

RHD5928

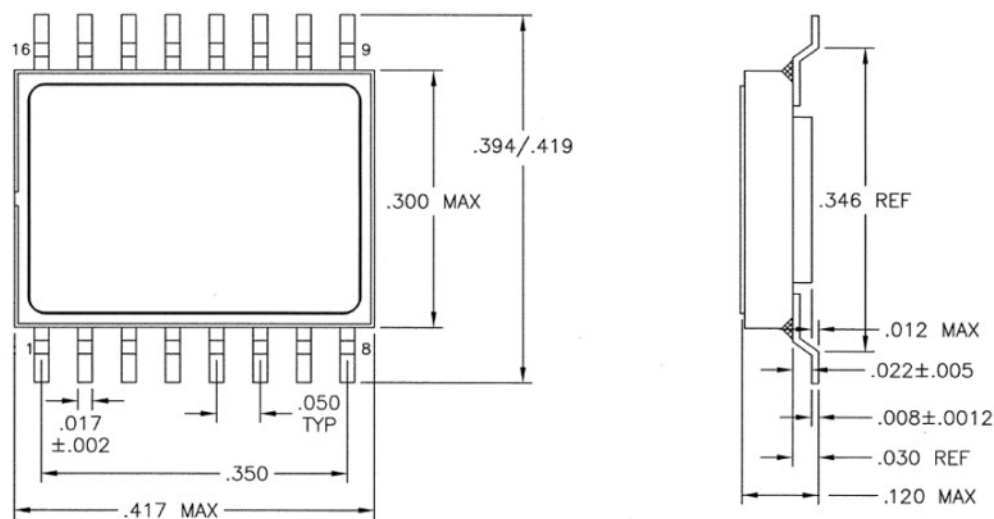


Figure 5: Package Outline

Note:

Package and lid are electrically isolated from signal pads.

Ordering Information

Model	DLA SMD #	Screening	Package
RHD5928-7	-	Commercial Flow, +25°C testing only	16-pin SOIC
RHD5928-S	-	Military Temperature, -55°C to +125°C Screened in accordance with the individual Test Methods of MIL-STD-883 for Space Applications	
RHD5928- 201-1S	5962-1220801KXC	In accordance with DLA SMD	
RHD5928- 201-2S	5962-1220801KXA		
RHD5928- 901-1S	5962H1220801KXC	In accordance with DLA Certified RHA Program Plan to RHA Level "H", 1 Mrad(Si)	
RHD5928- 901-2S	5962H1220801KXA		

Revision History

Date	Revision	Change Description
03/28/2016	E	Import into CAES format
03/08/2021	F	Revised Per ECN 23542

SCD5928

8-Channel Analog Multiplexer

RHD5928



Datasheet Definitions

	DEFINITION
Advanced Datasheet	CAES reserves the right to make changes to any products and services described herein at any time without notice. The product is still in the development stage and the datasheet is subject to change . Specifications can be TBD and the part package and pinout are not final .
Preliminary Datasheet	CAES reserves the right to make changes to any products and services described herein at any time without notice. The product is in the characterization stage and prototypes are available.
Datasheet	Product is in production and any changes to the product and services described herein will follow a formal customer notification process for form, fit or function changes.

The following United States (U.S.) Department of Commerce statement shall be applicable if these commodities, technology, or software are exported from the U.S.: These commodities, technology, or software were exported from the United States in accordance with the Export Administration Regulations. Diversion contrary to U.S. law is prohibited.

Cobham Long Island Inc. d/b/a CAES reserves the right to make changes to any products and services described herein at any time without notice. Consult an authorized sales representative to verify that the information in this data sheet is current before using this product. The company does not assume any responsibility or liability arising out of the application or use of any product or service described herein, except as expressly agreed to in writing; nor does the purchase, lease, or use of a product or service convey a license under any patent rights, copyrights, trademark rights, or any other of the intellectual rights of the company or of third parties.